



AWNING PICTURE ELEVATIONS

AC/AW B.U.
AW U.D.
R. OPG.
GLASS SIZE




P4036
3W3H

P4836
4W3H




P4040
3W3H

P4840
4W3H

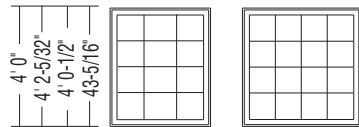


P4048
3W4H

P4848
4W4H

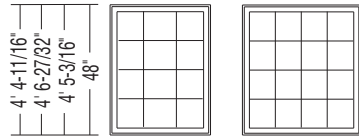


P4052
3W4H

P4852
4W4H

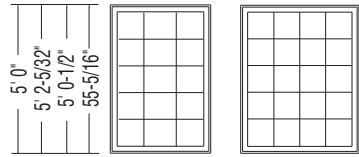


P4060
3W5H

P4860
4W5H

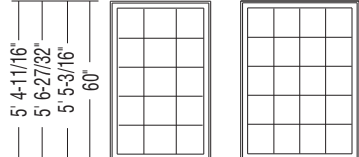

P4064
3W5H

P4864
4W5H

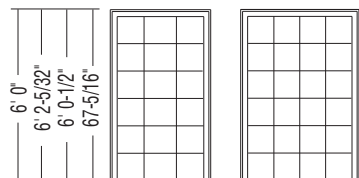

P4072
3W6H

P4872
4W6H

AWNING OPENING SPECIFICATIONS

UNIT CODE	CLEAR OPENING			DAYLIGHT SQ. FT.	VENT. SQ. FT.
	SQ. FT.	WIDTH	HEIGHT		
2420	1.6	20-1/2"	11-1/16"	1.9	1.9
2424	2.0	20-1/2"	14-3/16"	2.3	2.4
2428	2.2	20-1/2"	15-1/8"	2.9	3.1
2820	1.9	25-3/16"	11-1/16"	2.4	2.4
2824	2.5	25-3/16"	14-3/16"	2.9	3.0
2828	2.6	25-3/16"	15-1/8"	3.7	3.8
3220	2.2	29-3/16"	11-1/16"	2.8	2.8
3224	2.9	29-3/16"	14-3/16"	3.5	3.4
3228	3.1	29-3/16"	15-1/8"	4.3	4.4
3232	3.3	29-3/16"	16-1/4"	5.1	5.2
3236	4.1	29-3/16"	20-7/16"	5.8	5.9
3240	4.9	29-3/16"	24"	6.6	6.8
3620	2.5	32-1/2"	11-1/16"	3.2	3.1
3624	3.2	32-1/2"	14-3/16"	3.9	3.8
3628	3.4	32-1/2"	15-1/8"	4.9	4.9
3632	3.7	32-1/2"	16-1/4"	5.7	5.8
3636	4.6	32-1/2"	20-7/16"	6.6	6.5
3640	5.4	32-1/2"	24"	7.4	7.6
4020	2.9	37-3/16"	11-1/16"	3.7	3.5
4024	3.7	37-3/16"	14-3/16"	4.5	4.4
4028	3.9	37-3/16"	15-1/8"	5.6	5.6
4032	4.2	37-3/16"	16-1/4"	6.6	6.6
4036	5.3	37-3/16"	20-7/16"	7.6	7.5
4040	6.2	37-3/16"	24"	8.5	8.7
4820	3.4	44-1/2"	11-1/16"	4.4	4.2
4824	4.4	44-1/2"	14-3/16"	5.4	5.3
4828	4.7	44-1/2"	15-1/8"	6.8	6.7
4832	5.0	44-1/2"	16-1/4"	8.0	7.9
4836	6.3	44-1/2"	20-7/16"	9.1	9.0
4840	7.4	44-1/2"	24"	10.3	10.4

SEMCO AWNING WINDOWS

Semco awning windows retain their rigidity with frames engineered for exceptional strength. Another Semco advantage – sash locks on the sides of the sash that actively restrict bowing by holding the sash snugly in place.

NOTES

- » Light pattern shown is standard.
- » When ordering a clad casement, use the prefix code "AC" before the unit number.
- » When ordering a wood (primed) casement, use the prefix code "AW" before the unit number.